



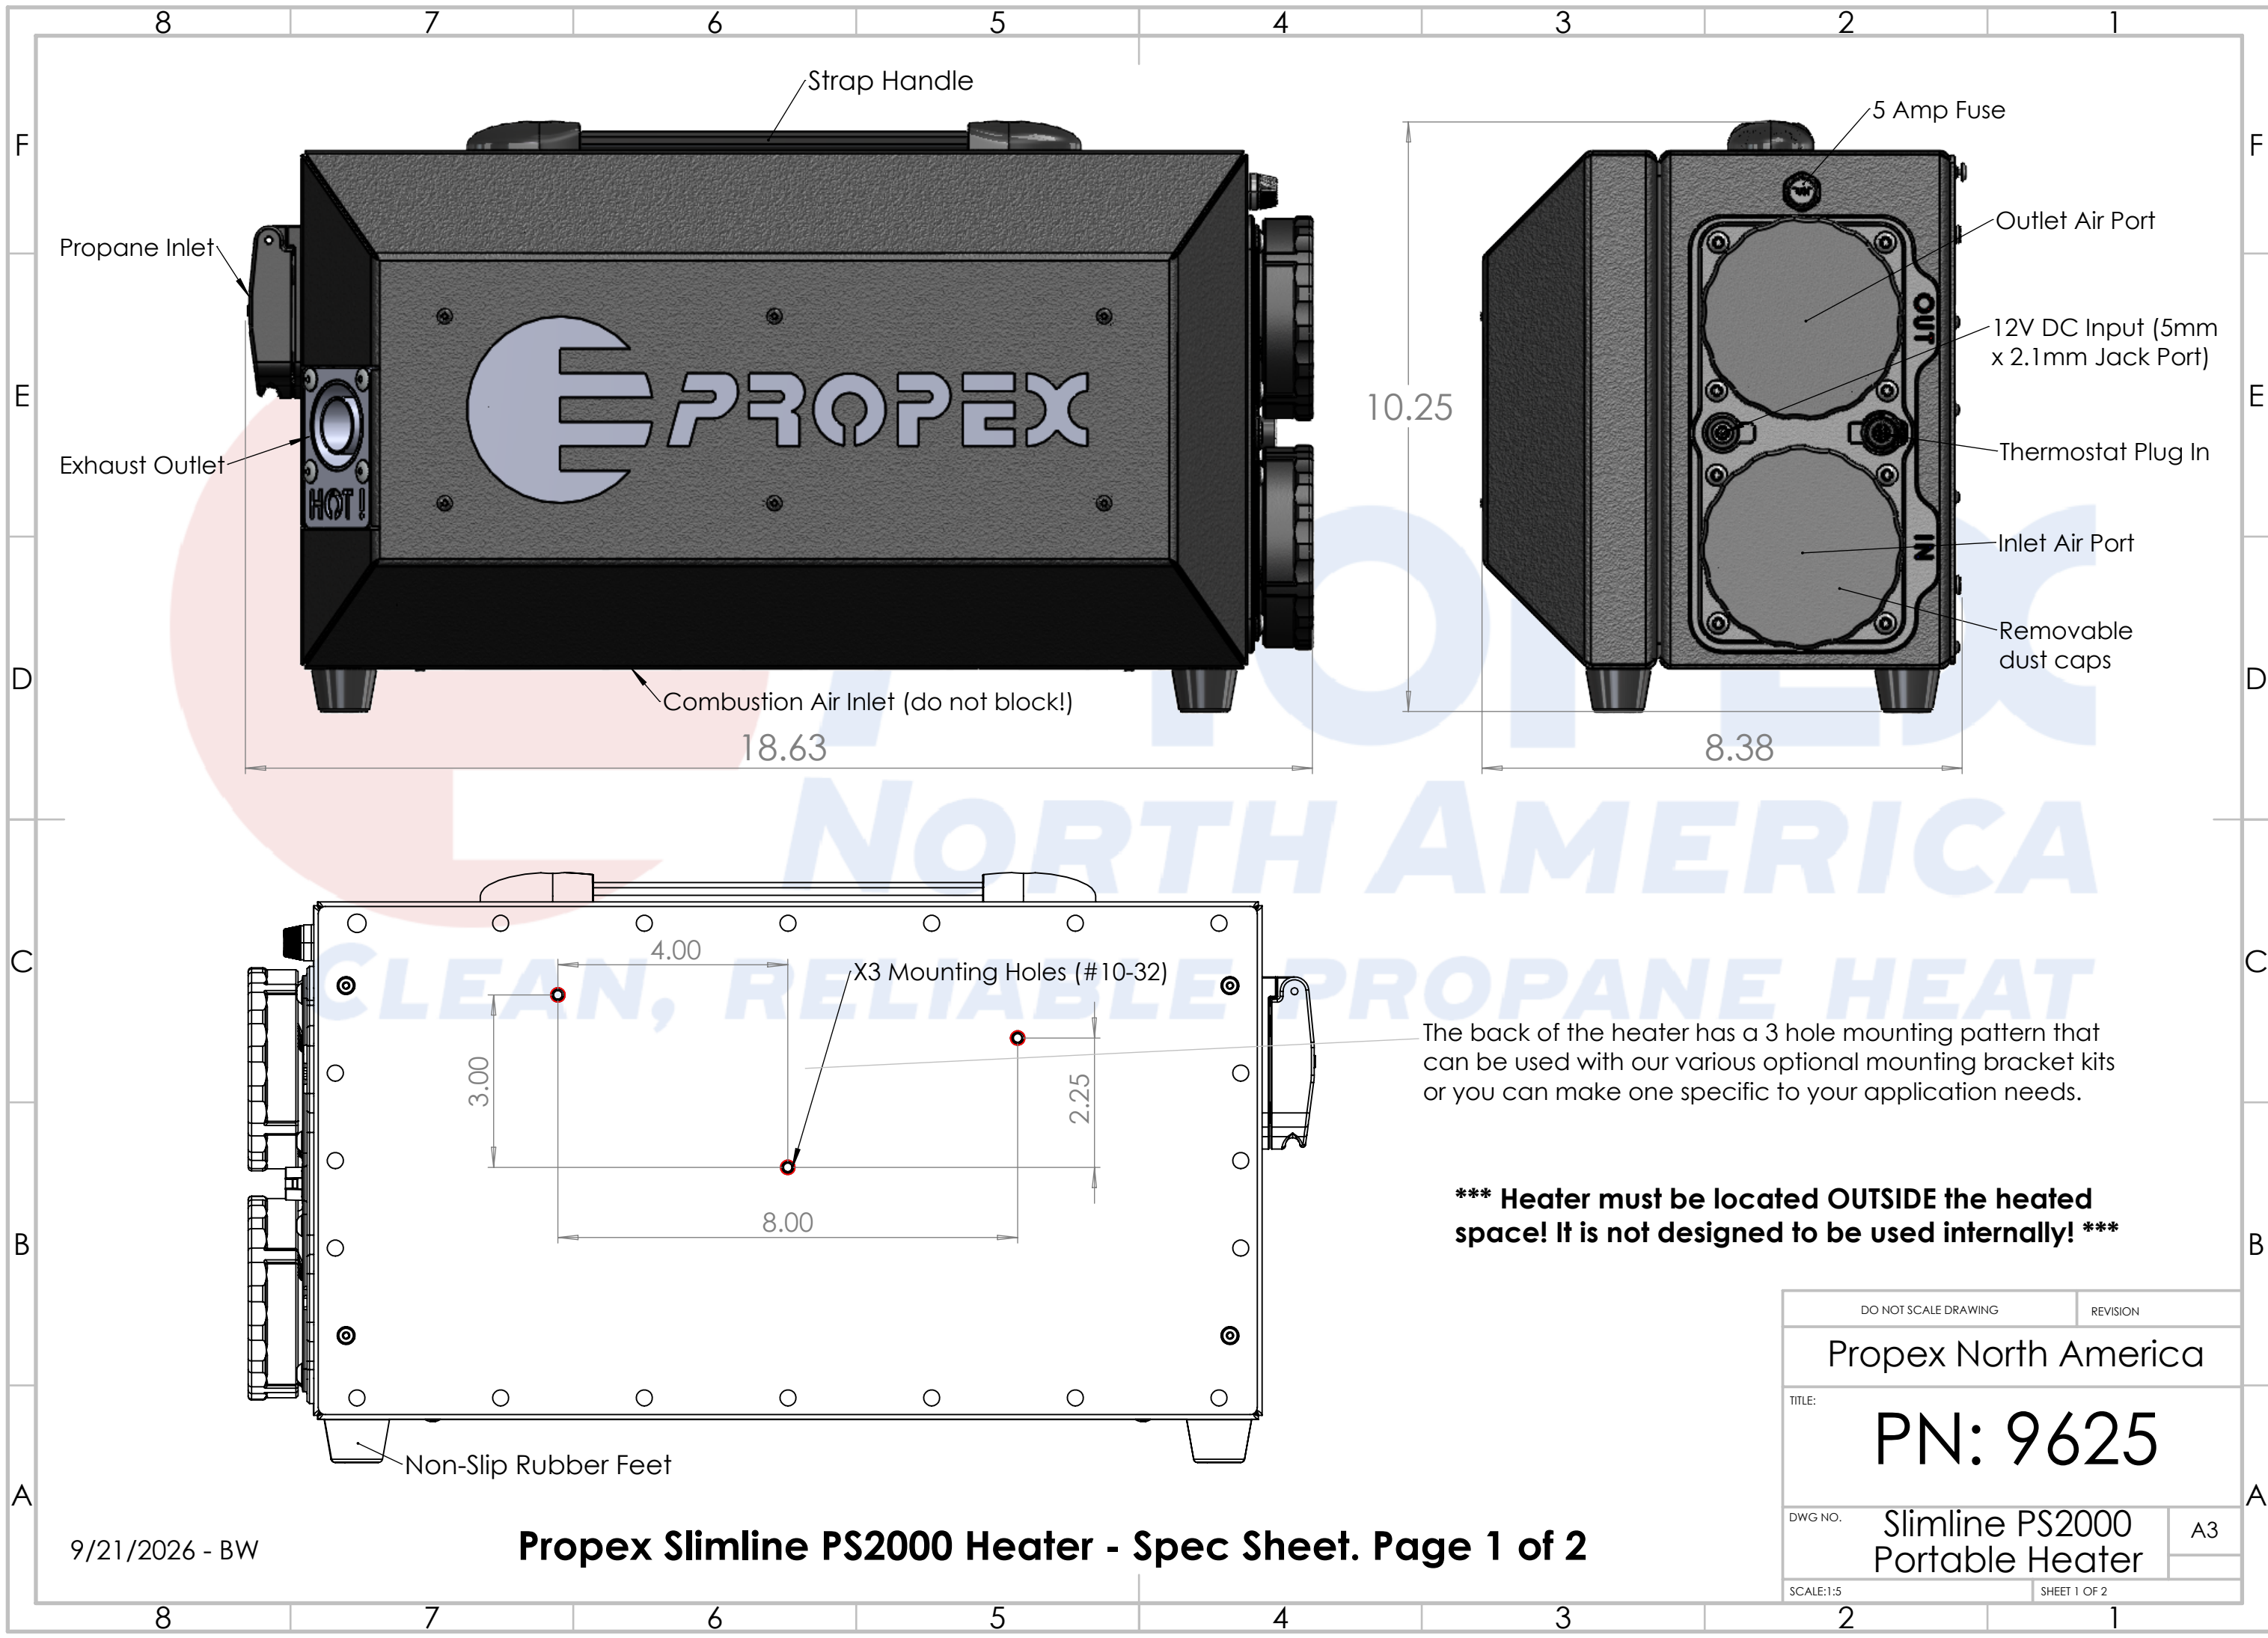

DO NOT SCALE DRAWING		REVISION	
Propex North America			
TITLE: PN: 9625			
DWG NO.		Slimline PS2000 Portable Heater	
SCALE:1:5		SHEET 1 OF 2	
		A3	

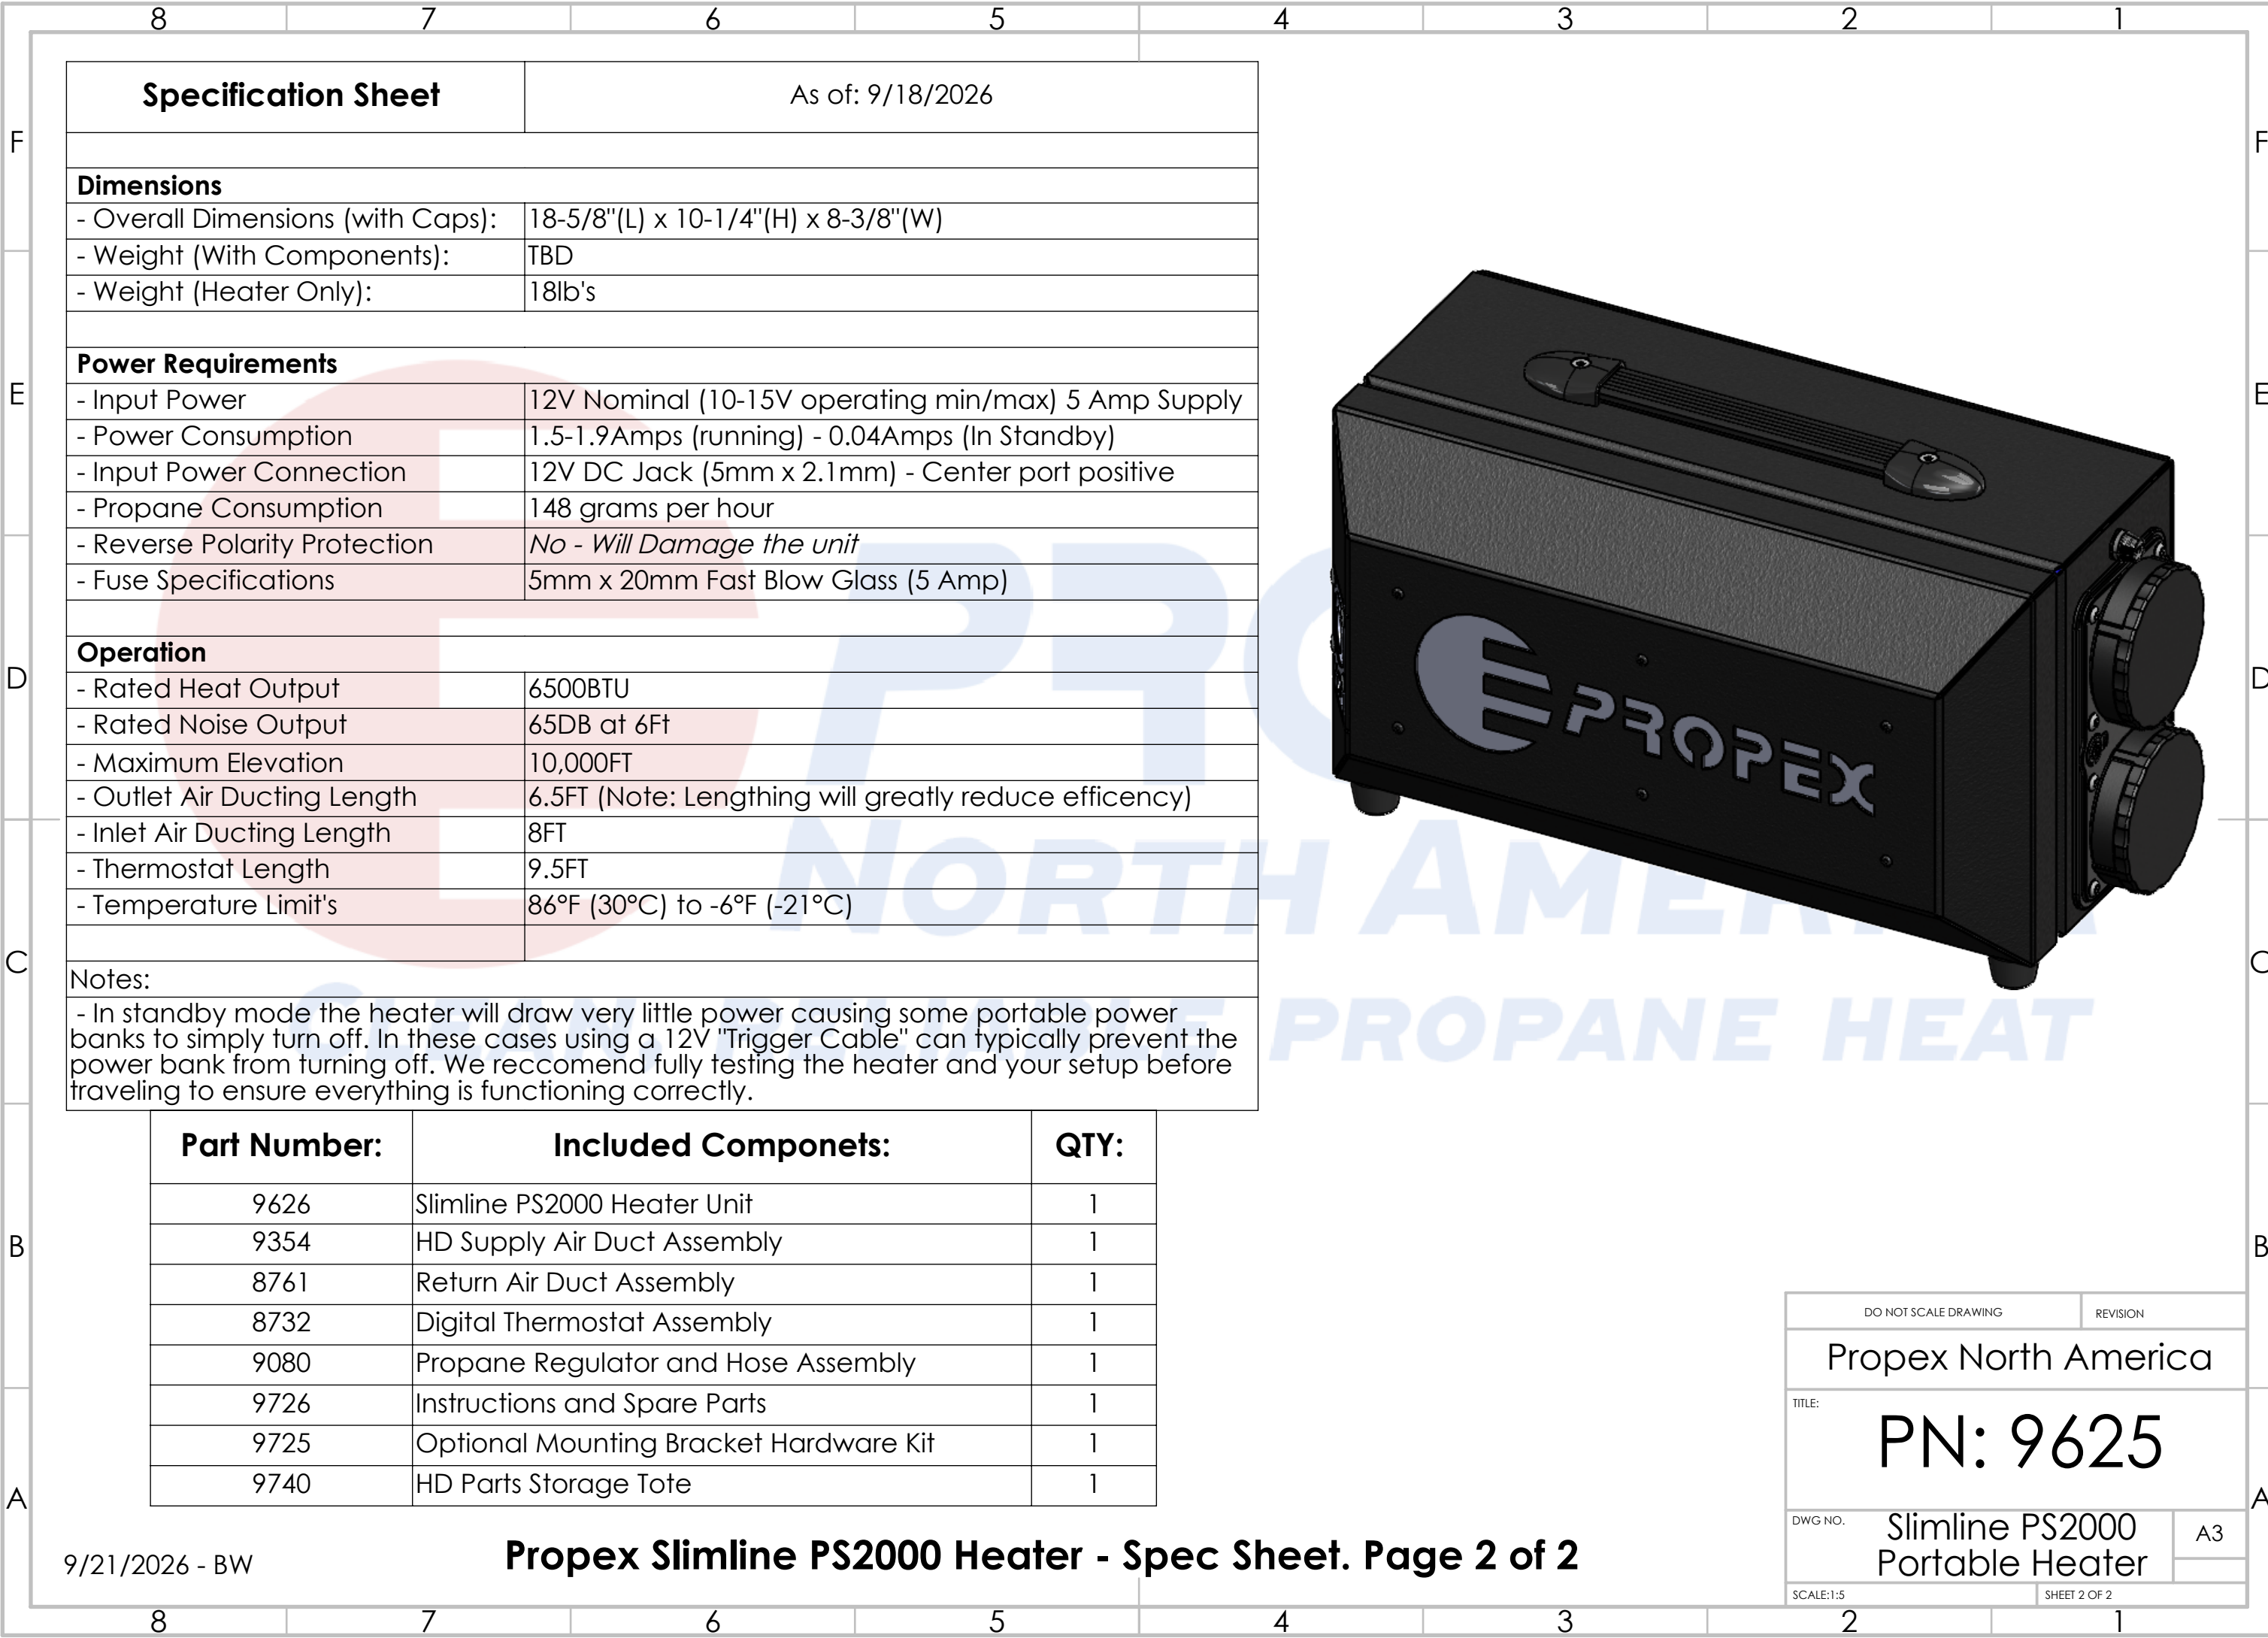

Specification Sheet		As of: 9/18/2026
Dimensions		
- Overall Dimensions (with Caps):	18-5/8"(L) x 10-1/4"(H) x 8-3/8"(W)	
- Weight (With Components):	TBD	
- Weight (Heater Only):	18lb's	
Power Requirements		
- Input Power	12V Nominal (10-15V operating min/max) 5 Amp Supply	
- Power Consumption	1.5-1.9Amps (running) - 0.04Amps (In Standby)	
- Input Power Connection	12V DC Jack (5mm x 2.1mm) - Center port positive	
- Propane Consumption	148 grams per hour	
- Reverse Polarity Protection	No - Will Damage the unit	
- Fuse Specifications	5mm x 20mm Fast Blow Glass (5 Amp)	
Operation		
- Rated Heat Output	6500BTU	
- Rated Noise Output	65DB at 6Ft	
- Maximum Elevation	10,000FT	
- Outlet Air Ducting Length	6.5FT (Note: Lengthing will greatly reduce efficiency)	
- Inlet Air Ducting Length	8FT	
- Thermostat Length	9.5FT	
- Temperature Limit's	86°F (30°C) to -6°F (-21°C)	
Notes:		
- In standby mode the heater will draw very little power causing some portable power banks to simply turn off. In these cases using a 12V "Trigger Cable" can typically prevent the power bank from turning off. We reccomend fully testing the heater and your setup before traveling to ensure everything is functioning correctly.		

Part Number:	Included Componets:	QTY:
9626	Slimline PS2000 Heater Unit	1
9354	HD Supply Air Duct Assembly	1
8761	Return Air Duct Assembly	1
8732	Digital Thermostat Assembly	1
9080	Propane Regulator and Hose Assembly	1
9726	Instructions and Spare Parts	1
9725	Optional Mounting Bracket Hardware Kit	1
9740	HD Parts Storage Tote	1



DO NOT SCALE DRAWING		REVISION
Propex North America		
TITLE:		PN: 9625
DWG NO.	Slimline PS2000 Portable Heater	A3
SCALE:1:5		SHEET 2 OF 2